



Republic of the Philippines
DEPARTMENT OF PUBLIC WORKS AND HIGHWAYS
CORDILLERA ADMINISTRATIVE REGION
Engineers Hill, Baguio City



Small Value Procurement [Section 53.9]

Name of Procuring Entity: DPWH-CAR Regional Office Request for Quotation: 24GP00143

Standard Form/Title: REQUEST FOR QUOTATION Office/End user: RO

COMPANY NAME :

ADDRESS :

TEL. NO./FAX NO.:

TIN No.

Please quote your lowest price on the item(s) listed below, subject to the Terms and conditions stated below and submit your quotation duly signed by your representative not later than 10:00 A.M. of 27 SEP 2024 in the return envelope attached herewith, to the BAC Chairman, DPWH-CAR Regional Office.

TERMS and CONDITIONS:

1. All entries must be typewritten or legibly written.
2. Delivery period within **15 CD** upon receipt of the approved funded Purchase Order (P.O.). Administrative penalties pursuant to Sec. 69 of the Revised IRR-RA 9184 shall be imposed for non-delivery without valid reason.
3. Warranty shall be for a minimum of three months for supplies & materials; one year for equipment from date of acceptance by the end-user.
4. Price validity shall be for a period of sixty (60) calendar days.
5. For all Suppliers, the two (2) envelope system will be followed. The first envelope shall contain the following eligibility document/s:
(A) PhilGEPS Platinum Certificate (Certified Copy) or PhilGEPS Registration Number;
(B) Mayor's Permit (Certified Copy); and
(C) Omnibus Sworn Statement. (*pursuant to Annex "H" Appendix A of RA 9184*)
The second envelope which will contain the quotation shall only be opened after the first is declared complying.
6. Bidders shall submit original brochures showing certifications of the product if applicable.
7. Please indicate the brand for each items being offered in order to evaluate conformity with specifications.
8. Suppliers must have a physical office/shop with trade name displayed and inventory of supplies / goods.
9. The approved budget ceiling for this procurement is **Php 448,555.50**
10. Source of Fund: **EAO**

LEO T. MUSTARD

BAC Chairman

RBP
JBL

AOD
FOM

Item no	ITEMS & DESCRIPTION	QTY	UNIT	UNIT PRICE	TOTAL PRICE
	24GP00143 - Procurement of Smart POE Swith for Physical Media Separation Device of CCTV Cameras and Local Internet Connectivity of this Office in relation to administrative overhead				
1	(see specs attached) Smart POE Switch: 24 10/100 Ports	6	unit		

Brand and Model : Warranty: _____
Delivery Period : Price Validity: _____

After having carefully read and accepted your General Conditions, I/We quote you on the item(s) at prices note above. If the space for delivery Period, Warranty and Price Validity are left blank, it means disqualification.

Tel No. Telefax:

(074) 424 1018

(074) 444-8838

dpwhcarbac@yahoo.com

Printed Name/Signature/Date

Tel. No./ Cellphone No. / E-mail Address

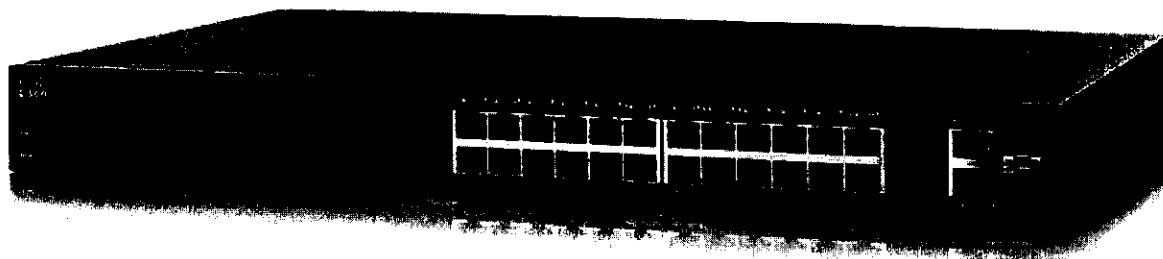


Table 1 shows the Quick Specs.

Product ID	SF200-24P
Device Type	Switch - 24 ports
Enclosure Type	Rack-mountable
Ports	24 x 10/100 + 2 x combo Gigabit SFP
Power Over Ethernet (PoE)	PoE
Performance	Switching capacity : 6.55 Mpps : Forwarding performance (64-byte packet size) : 8.8 Gbps
MAC Address Table Size	8000 entries
Jumbo Frame Support	Yes
Remote Management Protocol	SNMP, RMON, HTTP, TFTP
Encryption Algorithm	MD5
Authentication Method	RADIUS
Features	Layer 2 switching, DHCP support, power over Ethernet (PoE), BOOTP support, VLAN support, IGMP snooping, Syslog support, port mirroring, DiffServ support, Weighted Round Robin (WRR) queuing, Broadcast Storm Control, IPv6 support, Multicast Storm Control, Unicast Storm Control, SNMP support, Spanning Tree Protocol (STP) support, Rapid Spanning Tree Protocol (RSTP), Trivial File Transfer Protocol (TFTP) support, Quality of Service (QoS), Jumbo Frames support, MLD snooping, SNMP, RMON, SNMP, Cisco Discovery Protocol, Auto SmartPorts

Compliant Standards	IEEE 802.3, IEEE 802.3u, IEEE 802.3z, IEEE 802.1D, IEEE 802.1Q, IEEE 802.3ab, IEEE 802.1p, IEEE 802.3af, IEEE 802.3x, IEEE 802.3ad (LACP), IEEE 802.1w, IEEE 802.1x, 802.3af PoE
RAM	128 MB
Flash Memory	16 MB
Status Indicators	Link activity, port transmission speed, system, PoE
Expansion and Connectivity	
Interfaces	24 x 10Base-T/100Base-TX - RJ-45 24 x 10Base-T/100Base-TX - RJ-45 - PoE 2 x 10Base-T/100Base-TX/1000Base-T - RJ-45 2 x SFP (mini-GBIC)
Power	
Power Device	Power supply - internal
Voltage Required	100-240V AC/50-60 Hz universal input
Miscellaneous	
Width	17.3 in
Depth	10.1 in
Height	1.7 in
Weight	7.6 lbs
Mounting Kit	Included
MTBF	307,098 hour(s)
Compliant Standards	UL 60950, FCC Part 15 A, CSA 22.2
Localization	Chinese (simplified), English, German, French, Italian, Spanish
Manufacturer Warranty	
Service & Support	Limited lifetime warranty
Service & Support Details	Limited warranty - lifetime : Technical support - web support - 1 year : Technical support - phone consulting - 1 year
Environmental Parameters	
Min Operating Temperature	32 ° F
Max Operating Temperature	104 ° F
Humidity Range Operating	10 - 90% (non-condensing)
Min Storage Temperature	-4 ° F
Max Storage Temperature	158 ° F
Humidity Range Storage	10 - 90% (non-condensing)

Device Type	Switch - 24 ports
Enclosure Type	Rack-mountable
Ports	24 x 10/100 + 2 x combo Gigabit SFP
Power Over Ethernet (PoE)	PoE
Performance	Switching capacity : 6.55 Mpps : Forwarding performance (64-byte packet size) : 8.8 Gbps
MAC Address Table Size	8000 entries
Jumbo Frame Support	Yes
Remote Management Protocol	SNMP, RMON, HTTP, TFTP
Encryption Algorithm	MD5
Authentication Method	RADIUS
Features	Layer 2 switching, DHCP support, power over Ethernet (PoE), BOOTP support, VLAN support, IGMP snooping, Syslog support, port mirroring, DiffServ support, Weighted Round Robin (WRR) queuing, Broadcast Storm Control, IPv6 support, Multicast Storm Control, Unicast Storm Control, STP support, Spanning Tree Protocol (STP) support, Rapid Spanning Tree Protocol (RSTP), Trivial File Transfer Protocol (TFTP) support, Quality of Service (QoS), Jumbo Frames support, MLD snooping, SNMP, RMON, STNP, Cisco Discovery Protocol, Auto SmartPorts
Compliant Standards	IEEE 802.3, IEEE 802.3u, IEEE 802.3z, IEEE 802.1D, IEEE 802.1Q, IEEE 802.3ab, IEEE 802.1p, IEEE 802.3af, IEEE 802.3x, IEEE 802.3ad (LACP), IEEE 802.1w, IEEE 802.1x, 802.3af PoE
RAM	128 MB
Flash Memory	16 MB
Status Indicators	Link activity, port transmission speed, system, PoE
Expansion and Connectivity	
Interfaces	24 x 10Base-T/100Base-TX - RJ-45 24 x 10Base-T/100Base-TX - RJ-45 - PoE 2 x 10Base-T/100Base-TX/1000Base-T - RJ-45 2 x SFP (mini-GBIC)
Power	
Power Device	Power supply - internal
Voltage Required	100-240V AC/50-60 Hz universal input
Miscellaneous	
Width	17.3 in
Depth	10.1 in
Height	1.7 in
Weight	7.6 lbs
Mounting Kit	Included
MTBF	307,098 hour(s)
Compliant Standards	UL 60950, FCC Part 15 A, CSA 22.2
Localization	Chinese (simplified), English, German, French, Italian, Spanish

Manufacturer Warranty

Service & Support

Limited lifetime warranty

Service & Support Details

Limited warranty - lifetime ; Technical support - web support - 1 year ; Technical support - phone consulting - 1 year

Environmental Parameters

Min Operating Temperature

32 ° F

Max Operating Temperature

104 ° F

Humidity Range Operating

10 - 90% (non-condensing)

Min Storage Temperature

-4 ° F

Max Storage Temperature

158 ° F

Humidity Range Storage

10 - 90% (non-condensing)