


Department of Public Works and Highways

Contract ID: **25LD0174**
 Contract Name: **Construction of Road, Purok 4-A, Domingo Road, Brgy. Dolo, Bansalan, Davao del Sur**
 Location of the Contract: **Bansalan, Davao del Sur**

Davao del Sur District Engineering Office
 Digos City, Davao del Sur

SUPPLEMENTAL BULLETIN NO. 2025-087

June 16, 2025

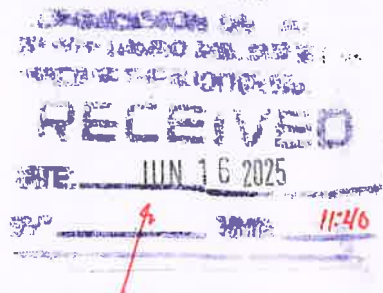

SUBJECT: Amendment of Minimum Major Equipment Requirements and Bill of Quantities (BOQ)

This Supplemental Bulletin No. 2025-087 is issued to amend provisions in the Bidding Documents (BDs) for the above stated contract, as follows:

Current Provision of BDs				Amended Provision under this Supplemental Bulletin				Remarks
BILL OF QUANTITIES (BOQ)								
Pay Item No.	Description	Unit	Quantity	Pay Item No.	Description	Unit	Quantity	
PART B. OTHER GENERAL REQUIREMENTS				PART B. OTHER GENERAL REQUIREMENTS				
B.5	Project Billboard / Signboard	Each	3.00	B.5	Project Billboard / Signboard	Each	3.00	No Change
B.7(2)	Occupational Safety and Health Program	Lump sum	1.00	B.7(2)	Occupational Safety and Health Program	Lump sum	1.00	No Change
B.8(2)	Traffic Management	Lump sum	1.00	B.8(2)	Traffic Management	Lump sum	1.00	No Change
B.9	Mobilization / Demobilization	Lump sum	1.00	B.9	Mobilization / Demobilization	Lump sum	1.00	No Change
PART C. EARTHWORK				PART C. EARTHWORK				
100(3)a1	Individual Removal of Trees, 150-300mm dia, small	Each	5.00	100(3)a1	Individual Removal of Trees, 150-300mm dia, small	Each	5.00	No Change
100(3)a2	Individual Removal of Trees, 301-500mm dia, small	Each	44.00	100(3)a2	Individual Removal of Trees, 301-500mm dia, small	Each	44.00	No Change
100(3)a3	Individual Removal of Trees, 501-750mm dia, small	Each	2.00	100(3)a3	Individual Removal of Trees, 501-750mm dia, small	Each	2.00	No Change
101(1)	Removal of Structures and Obstruction	Lump Sum	1.00	101(1)	Removal of Structures and Obstruction	Lump Sum	1.00	No Change
101(4)a1	Removal of Actual Structures/Obstruction, 610mm dia, RCPC	Linear Meter	10.00	101(4)a1	Removal of Actual Structures/Obstruction, 610mm dia, RCPC	Linear Meter	10.00	No Change
101(4)a3	Removal of Actual Structures/Obstruction, 910mm dia, RCPC	Linear Meter	13.00					Deleted Pay Item

				101(4)a7	Removal of Actual Structures/Obstruction, 1830mm dia, RCPC	Linear Meter	6.00	Additional Pay Item
				103(1)a	Structure Excavation, Common Soil	Cubic Meter	183.25	Additional Pay Item
103(3)	Foundation Fill	Cubic Meter	<u>7.68</u>	103(3)	Foundation Fill	Cubic Meter	29.16	Amended Quantity
103(6)a	Pipe Culverts and Drain Excavation, Common Soil	Cubic Meter	56.66	103(6)a	Pipe Culverts and Drain Excavation, Common Soil	Cubic Meter	56.66	No Change
104(1)a	Embankment from Roadway/Structure Excavation, Common Soil	Cubic Meter	<u>912.38</u>	104(1)a	Embankment from Roadway/Structure Excavation, Common Soil	Cubic Meter	1,086.27	Amended Quantity
104(2)a	Embankment from Borrow, Common Soil	Cubic Meter	<u>1,495.77</u>	104(2)a	Embankment from Borrow, Common Soil	Cubic Meter	1,425.43	Amended Quantity
105(1)a	Subgrade Preparation, Common Material	Square Meter	<u>1,753.48</u>	105(1)a	Subgrade Preparation, Common Material	Square Meter	1,824.22	Amended Quantity
PART D. SUBBASE AND BASE COURSE				PART D. SUBBASE AND BASE COURSE				
200(1)	Aggregate Subbase Course	Cubic Meter	<u>1,265.70</u>	200(1)	Aggregate Subbase Course	Cubic Meter	1,419.72	Amended Quantity
PART E. SURFACE COURSES				PART E. SURFACE COURSES				
311(1)a	<i>Portland Cement Concrete Pavement (Unreinforced) - 0.15 m. thk., 14 days</i>	<i>Square Meter</i>	<i>390.00</i>					<i>Deleted Pay Item</i>
311(1)d1	Portland Cement Concrete Pavement (Unreinforced) - 0.25 m. thk., 14 days	Square Meter	<u>2,506.08</u>	311(1)d1	Portland Cement Concrete Pavement (Unreinforced) - 0.25 m. thk., 14 days	Square Meter	2,491.44	Amended Quantity
PART F. BRIDGE CONSTRUCTION (RCBC)				PART F. BRIDGE CONSTRUCTION (RCBC)				
				404(1)a	Reinforcing Steel, Grade 40	Kilogram	2,742.40	Additional Pay Item
404(1)b	Reinforcing Steel, Grade 60	Kilogram	<u>2,677.55</u>	404(1)b	Reinforcing Steel, Grade 60	Kilogram	900.00	Amended Quantity
405(1)b3	Structural Concrete, 27.58 Mpa, Class A, 28 days	Cubic Meter	<u>38.38</u>	405(1)b3	Structural Concrete, 27.58 Mpa, Class A, 28 days	Cubic Meter	50.74	Amended Quantity
407(8)	Lean Concrete, Class B (16.5 Mpa)	Cubic Meter	<u>2.17</u>	407(8)	Lean Concrete, Class B (16.5 Mpa)	Cubic Meter	1.44	Amended Quantity
PART G. DRAINAGE AND SLOPE PROTECTION STRUCTURE				PART G. DRAINAGE AND SLOPE PROTECTION STRUCTURE				
500(1)d	Pipe Culvert, Class IV, RCPC	Linear Meter	40.00	500(1)d	Pipe Culvert, Class IV, RCPC	Linear Meter	62.00	Amended Quantity

506(1)	Stone Masonry	Cubic Meter	31.84	506(1)	Stone Masonry	Cubic Meter	31.84	No Change
PART H. MISCELLANEOUS STRUCTURES				PART H. MISCELLANEOUS STRUCTURES				
612(1)	Reflectorized Thermoplastic Pavement Markings, White	Square Meter	125.00	612(1)	Reflectorized Thermoplastic Pavement Markings, White	Square Meter	125.00	No Change

This Supplemental Bulletin shall form an integral part of the Bidding Documents.

For the guidance and information of all concerned.


ROMEO C. CANIBAN
 Chief, Construction Section
 BAC Chairperson