


Department of Public Works and Highways

Contract ID: **25LD0225**
 Contract Name: **Concreting of Batang, Brgy. Palili FMR, Brgy. Palili, Sulop, Davao del Sur**
 Location of the Contract: **Sulop, Davao del Sur**

Davao del Sur District Engineering Office
 Digos City, Davao del Sur

SUPPLEMENTAL BULLETIN NO. 2025-088

June 16, 2025

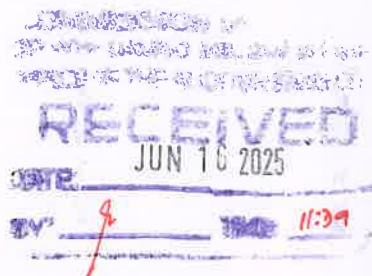

SUBJECT: Amendment of Minimum Major Equipment Requirements and Bill of Quantities (BOQ)

This Supplemental Bulletin No. 2025-088 is issued to amend provisions in the Bidding Documents (BDs) for the above stated contract, as follows:

Current Provision of BDs				Amended Provision under this Supplemental Bulletin				Remarks
BILL OF QUANTITIES (BOQ)								
Pay Item No.	Description	Unit	Quantity	Pay Item No.	Description	Unit	Quantity	
PART B. OTHER GENERAL REQUIREMENTS				PART B. OTHER GENERAL REQUIREMENTS				
B.4(8)	Permanent Monuments and Markers	Each	1.00	B.4(8)	Permanent Monuments and Markers	Each	1.00	No Change
B.5	Project Billboard / Signboard	Each	3.00	B.5	Project Billboard / Signboard	Each	3.00	No Change
B.7(2)	Occupational Safety and Health Program	Lump sum	1.00	B.7(2)	Occupational Safety and Health Program	Lump sum	1.00	No Change
B.8(2)	Traffic Management	Lump sum	1.00	B.8(2)	Traffic Management	Lump sum	1.00	No Change
B.9	Mobilization / Demobilization	Lump sum	1.00	B.9	Mobilization / Demobilization	Lump sum	1.00	No Change
PART C. EARTHWORK				PART C. EARTHWORK				
100(3)a2	Individual Removal of Trees, 301-500 mm.dia, Small	Each	86.00	100(3)a2	Individual Removal of Trees, 301-500 mm.dia, Small	Each	92.00	Amended Quantity
100(3)a3	Individual Removal of Trees, 501-750 mm.dia, Small	Each	1.00	100(3)a3	Individual Removal of Trees, 501-750 mm.dia, Small	Each	1.00	No Change
101(1)	Removal of Structures and Obstruction	Lump Sum	1.00	101(1)	Removal of Structures and Obstruction	Lump Sum	1.00	No Change
102(2)	Surplus Common Excavation	Cubic Meter	317.00	102(2)	Surplus Common Excavation	Cubic Meter	224.00	Amended Quantity
103(1)a	Structure Excavation, Common Soil	Cubic Meter	2,481.96	103(1)a	Structure Excavation, Common Soil	Cubic Meter	1,702.70	Amended Quantity
103(3)	Foundation Fill	Cubic Meter	344.13	103(3)	Foundation Fill	Cubic Meter	69.07	Amended Quantity

104(1)a	Embankment from Roadway/Structure Excavation, Common Soil	Cubic Meter	<u>1,055.28</u>	104(1)a	Embankment from Roadway/Structure Excavation, Common Soil	Cubic Meter	<u>1,110.48</u>	Amended Quantity
105(1)a	Subgrade Preparation, Common Material	Square Meter	<u>5,829.43</u>	105(1)a	Subgrade Preparation, Common Material	Square Meter	<u>5,779.65</u>	Amended Quantity
PART D. SUBBASE AND BASE COURSE				PART D. SUBBASE AND BASE COURSE				
200(1)	Aggregate Subbase Course	Cubic Meter	<u>2,199.22</u>	200(1)	Aggregate Subbase Course	Cubic Meter	<u>2,165.46</u>	Amended Quantity
PART E. SURFACE COURSES				PART E. SURFACE COURSES				
311(1)a	Portland Cement Concrete Pavement (Unreinforced) - 0.15 m. thk., 14 days	Square Meter	<u>624.00</u>	311(1)a	Portland Cement Concrete Pavement (Unreinforced) - 0.15 m. thk., 14 days	Square Meter	<u>794.70</u>	Amended Quantity
311(1)d1	Portland Cement Concrete Pavement (Unreinforced) - 0.25 m. thk., 14 days	Square Meter	4,525.56	311(1)d1	Portland Cement Concrete Pavement (Unreinforced) - 0.25 m. thk., 14 days	Square Meter	4,525.56	No Change
PART F. BRIDGE CONSTRUCTION (RCBC)				PART F. BRIDGE CONSTRUCTION (RCBC)				
404(1)a	Reinforcing Steel, Grade 40	Kilogram	2,510.49	404(1)a	Reinforcing Steel, Grade 40	Kilogram	2,510.49	No Change
404(1)b	Reinforcing Steel, Grade 60	Kilogram	9,299.33	404(1)b	Reinforcing Steel, Grade 60	Kilogram	9,299.33	No Change
405(1)b3	Structural Concrete 27.58 Mpa, Class A, 28 days	Cubic Meter	92.46	405(1)b3	Structural Concrete 27.58 Mpa, Class A, 28 days	Cubic Meter	92.46	No Change
407(8)	Lean Concrete, Class B (16.5 Mpa)	Cubic Meter	3.36	407(8)	Lean Concrete, Class B (16.5 Mpa)	Cubic Meter	3.36	No Change
PART G. DRAINAGE AND SLOPE PROTECTION STRUCTURE				PART G. DRAINAGE AND SLOPE PROTECTION STRUCTURE				
505(2)a	Grouted Riprap, Class A	Cubic Meter	<u>1,104.48</u>	505(2)a	Grouted Riprap, Class A	Cubic Meter	<u>1,338.59</u>	Amended Quantity
PART H. MISCELLANEOUS STRUCTURES				PART H. MISCELLANEOUS STRUCTURES				
603(3)a1	Metal Guardrail (Metal Beam) Including Post, Single W-Beam	Linear Meter	<u>430.53</u>	603(3)a1	Metal Guardrail (Metal Beam) Including Post, Single W-Beam	Linear Meter	<u>339.09</u>	Amended Quantity
603(4)b	Metal Beam End Piece, Bull Nose	Each	<u>4.00</u>	603(4)b	Metal Beam End Piece, Bull Nose	Each	<u>2.00</u>	Amended Quantity
612(1)	Reflectorized Thermoplastic Pavement Markings, White	Square Meter	<u>188.30</u>	612(1)	Reflectorized Thermoplastic Pavement Markings, White	Square Meter	<u>187.50</u>	Amended Quantity

This Supplemental Bulletin shall form an integral part of the Bidding Documents.

For the guidance and information of all concerned.

ROMEO C. CANIBAN
 Chief, Construction Section
 BAC Chairperson