

Name of Procuring Entity:

Standard Form/Title :

COMPANY NAME : ADDRESS :


TEL. NO./FAX No :

Revised on:

#### Republic of the Philippines

#### DEPARTMENT OF PUBLIC WORKS AND HIGHWAYS

## **REGIONAL OFFICE IX**



Request for Quotation (P.R. No.):

DPWH, Regional Office IX, Z.C.

**REQUEST FOR QUOTATION** 

de	A #	
	W///	
1000		
BAGON	PILIPINA	S

25-05-071

Date:


TIN:

Office/End-User:

May 22, 2025

Management

signed by y	uote your lowest price on the item(s) listed below, subject to the Ter your representative not later than 10:00 A.M. of Unit, DPWH Regional Office IX, Veterans Avenue Extension, Tetuan,		_ in the retu		it your quotation duly ned herewith, to the	
	CONDITIONS: must be typewritten or legibly written					
2. The delivery period within 15 calendar days upon receipt of the approved funded Purchase Order (P.O.). Administrative penalties pursuant to Sec. 69 of the Revised IRR-RA 9184 shall be imposed for non-delivery without valid reason  3. Warranty shall be for a mininum of three (3) months for supplies & materials; one year for Equipment; 3 years IT Equipment from date of acceptance by the end-user.  4. Price validity shall be for a period of sixty (60) calendar days.  5. PhilG-EPS Registration Certificate, Mayor's Permit, DTI/SEC, Omnibus Sworn Statement (for above 50,000.00), Tax Clearance shall be attached upon submission of the quotation.  6. Bidders shall submit original brochures of the product .  7. Please indicate the brand for each items being offered.  8. The approved budget ceiling for this procurement is Php 226,050.00						
ITEM NO.	ITEMS & DESCRIPTION	QTY	UNIT	UNIT PRICE	TOTAL PRICE	
	Fareline	4	niess			
1	Equalizer Towards for Mixey and Equalizer	1	piece			
2	Tourcase for Mixer and Equalizer		piece			
3	Wireless Conference System Main	1	piece			
4	Wireless Delegates Unit	13	unit			
5	PTZ Camera POE Function, 20x Optical	1	piece	<u> </u>		
6	Ulanzi T068 TT35 Multifunctional Tripod	1	piece			
	~Nothing Follows~					
	Purpose: For use in Regional Director's Conference Room 3rd Floor.					
Brand and Delivery Pe	riod : Price Validity	:				
	ving carefully read and accepted your General Conditions, I / We of iod, Warranty and Price Validity are left blank, it means that I concur i					
Tel.	. No. 993-3037			inted Name / Signat		

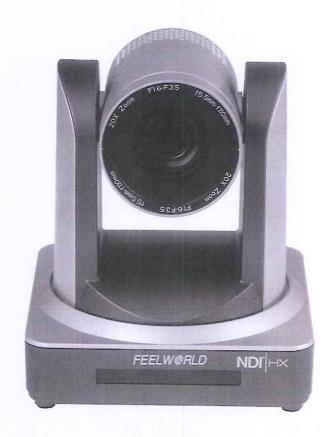





# **DI Professional Live Streaming Camera**

All-in-one Live Video Production Solution

FEELWORLD NDI20X is a full HD PTZ camera with 20x optical zoom, simultaneous NDI/IP, 3G-SDI, HDMI video output interfaces. Supports PoE, which allows you easily transmit all the informations and power for device only by one cable. It is ideal for video conferencing, education, live broadcasting, broadcasting and churches.

### **Multiple Video Output**

Stream to Your Favorite Platforms

Simultaneous HDMI, 3G-SDI, and IP/NDI video output and multiplel network Protocol allow NDIX20 to easily live streaming to your favorite platforms, such as YouTube, Fackbook, Twitch, etc.

Note: The 3G-SDI is available for 100m transmission at 1080p60 format.

# NDI | HX Live Video Production Support Protocol

NDI20X comes with NDI interface transmission protocol, with low-latency video and audio transmission, and reduces wiring costs and deployment time, satisfies the needs of studios and on-site multi-camera video production.

#### **PoE Support**

No more pesky wires

The PTZ camera supports PoE (Power over Ethernet), just one cable can be used for power, video/audio streaming and control.

# 1080P@60 HD Image Quality + 20X Optical Zoom

Realize a Life-like Video Experience

The high resolution 1080P@60fps, outstanding color reproduction. 20X zoom delivers premium optics and life-like video to create the experience of sitting together in the same room, even if you are a thousand miles away.

## **Low Light Correction**

The low-light performance technology can automatically adjust the brightness level. Every moment can be seen clearly even in dark or back light condition. Outstanding performance and video quality make live recording extremely convenient.

#### H.264&H.265 Encoding, More Smooth and Clear Video motion

IP live streaming supports H.264&H.265 video compression, which makes motion video more fluent and clear under low bandwidth conditions.

#### **Auto Focus, Smart Frame Capture Everyone**

Take close-ups on characters, details, and there is no need to worry about blurring your image when you're speaking choice.

#### Accurate, Smooth and Silent PTZ Movement

Capture every person in the room with multi-angle

Built-in two-way high speed and silent pan/tilt, the lens can rotate 340° horizontally ( $\pm 170^{\circ}$ ) and 120° vertically ( $-30^{\circ} \sim +90^{\circ}$ ).

Low Noise and High SNR

Super high SNR image is achieved with low noise CMOS. Advanced 2D/3D noise reduction technology further reduces the noise while ensuring high image clarity.

#### Up to 255 Preset Positions

The secret to more productive meetings

10 preset positions by IR remote controller, that can save pan, tilt, and zoom settings, and smoothly transitions between them at the touch of a button. Up to 255 preset positions via WEBSEVER.

#### Multi Ways to Control Your Camera

Operate Nearby or Far Away

You can Pan, tilt, and zoom with the hand-held remote to see everything in your workspace. You can also operate it from a remote location with WBESREVER software or FEELWORLD L2 PLUS video switcher.

**Multiple Mounting Options** 

NDI20X can be installed on any wall/ceiling/tripod to capture close-up shots for your every Live Video Production.

Note: Bracket not included


#### **Multiple Application**

NDI20X is widely use for church streaming, video conference, sports events, online education, ect.

- 20X optical zoom professional full HD camera, suitable for larger occasion
- Up to 1080p@60fps, higher quality image
- Simultaneous 3G-SDI, HDMI, NDI/IP Streaming video out, easily for professional video production
- PoE(Power over Ethernet) supported
- Double track 3.5mm linear input for audio
- Auto focus, smart frame capture everyone
- Supports H.265/H.264 encoding which makes motion video fluent and clear even with less than ideal bandwidth conditions.
- Advanced 2D/3D noise reduction technology further reduces the noise while ensuring high image clarity
- High speed and silent pan/tilt, capture all the actions
- Multiple control protocol and network protocol
- Low-power sleep function
- Ideal for church live streaming, video confrence, sports events, online education, ect.
- User Manual









# Yamaha YVC-330 USB & Bluetooth Speakerphone - Designed for Versatile Conference Environments

The Yamaha YVC-330 is an advanced conference speakerphone optimized for small, medium, and open-area workspaces. With USB, Bluetooth, NFC, and 3.5mm auxiliary connectivity, the YVC-330 ensures smooth and effortless communication for all meeting types. Its SoundCap technology reduces background noise and enhances voice clarity, making it ideal for open spaces. Certified for Zoom, this speakerphone features a 360° voice pickup via three unidirectional microphones, adaptive echo-cancellation, and the ability to daisy chain two units for larger spaces.

# Key Features:

- 360° Pickup: Three unidirectional microphones cover all angles for clear voice capture.
- SoundCap Technology: Eliminates background noise and optimizes voice clarity for open-area meetings.
- Multiple Connectivity Options: USB, Bluetooth, NFC, and 3.5mm aux for versatile usage.
- Zoom Certified: Ensures compatibility with Zoom for seamless video conferencing.
- Daisy Chain Capability: Combine two units to cover medium to large rooms.

Buy the Yamaha YVC-330 today from Video Conference Gear, a division of Cloud Connextions, and elevate your conference experience with superior audio performance.

# Technical Specifications:

- Wireless Technology: Bluetooth 4.2, NFC
- Connections: USB Mini 2.0, 3.5mm Aux
- Microphones: 3 Unidirectional (360° coverage)
- Audio Features: Active Noise Cancellation, SoundCap, Echo Cancellation
- Speaker Frequency Response: 190 Hz 20 kHz
- Microphone Frequency Response: 100 Hz 20 kHz
- Maximum SPL: 91 dB @ 1.64 ft
- System Compatibility: Windows 7+, macOS 10.12+, Chrome OS
- Dimensions: 9.3 x 1.8 x 8.9 inches
- Weight: 1.8 lbs (0.82 kg)

Perfect for both open and small spaces, the YVC-330 brings simplicity, clarity, and flexibility to your conference calls.