


Department of Public Works and Highways

Contract ID: **25LD0176**
 Contract Name: **Construction of Road, Sitio Balatikan, Barangay Kapatagan, Digos City, Davao del Sur**
 Location of the Contract: **Digos City, Davao del Sur**

Davao del Sur District Engineering Office
 Digos City, Davao del Sur

SUPPLEMENTAL BULLETIN NO. 2025-082

June 11, 2025

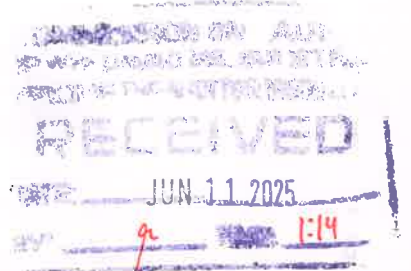

SUBJECT: Amendment of Minimum Major Equipment Requirements and Bill of Quantities (BOQ)

This Supplemental Bulletin No. 2025-082 is issued to amend provisions in the Bidding Documents (BDs) for the above stated contract, as follows:

Current Provision of BDs				Amended Provision under this Supplemental Bulletin				Remarks
MINIMUM MAJOR EQUIPMENT REQUIREMENTS								
Construction Equipment		Minimum Capacity/ Unit	Required No. of Units	Construction Equipment		Minimum Capacity/ Unit	Required No. of Units	
1	Dump Truck	12 yd³/10 m³	4	1	Dump Truck	12 yd³/10 m³	4	No Change
2	Payloader	1.95 yd³/ 1.5 m³	1	2	Payloader	1.95 yd³/ 1.5 m³	1	No Change
3	Bulldozer	-	1	3	Bulldozer	-	1	No Change
4	Backhoe	1.04 yd³/ 0.8 m³	1	4	Backhoe	1.04 yd³/ 0.8 m³	1	No Change
5	Water Truck/Pump	16000 L	<u>1</u>	5	Water Truck/Pump	16000 L	<u>2</u>	<u>Corrected No. of Units</u>
6	Vibratory Roller	10 mt	1	6	Vibratory Roller	10 mt	1	No Change
7	Motorized Road Grader	-	1	7	Motorized Road Grader	-	1	No Change
8	Transit Mixer	5-6 yd³	4	8	Transit Mixer	5-6 yd³	4	No Change
9	Concrete Vibrator, Flexible Shaft Type 2" Head Ø, Gasoline Drive Unit	5 Amperes	<u>1</u>	9	Concrete Vibrator, Flexible Shaft Type 2" Head Ø, Gasoline Drive Unit	5 Amperes	<u>2</u>	<u>Corrected No. of Units</u>
10	Concrete Saw, 14" Blade Ø with 4¾" Cutting Depth	-	1	10	Concrete Saw, 14" Blade Ø with 4¾" Cutting Depth	-	1	No Change
11	Bar Cutter, Single Phase	25 mm RebarØ	1	11	Bar Cutter, Single Phase	25 mm RebarØ	1	No Change
12	Bar Bender, Three Phase	25 mm RebarØ	1	12	Bar Bender, Three Phase	25 mm RebarØ	1	No Change
13	Concrete Screeder, Wacker Truss Screed	-	1	13	Concrete Screeder, Wacker Truss Screed	-	1	No Change
14	Cargo/Service Truck	9-10 mt	1	14	Cargo/Service Truck	9-10 mt	1	No Change
15	Cargo/Service Truck	2-5 mt	1	15	Cargo/Service Truck	2-5 mt	1	No Change

16	One Bagger Mixer	4-6 ft ³ /min	1	16	One Bagger Mixer	4-6 ft ³ /min	1	No Change
17	Chainsaw	-	1	17	Chainsaw	-	1	No Change
18	Plate Compactor	5 Hp	1	18	Plate Compactor	5 Hp	1	No Change
19	Applicator Machine	-	1	19	Applicator Machine	-	1	No Change
20	Kneading Machine	-	1	20	Kneading Machine	-	1	No Change
21	Mechanized Joint Sealer (Set)	-	1	21	Mechanized Joint Sealer (Set)	-	1	No Change
22	Boom Truck	-	1	22	Boom Truck	-	1	No Change
23	<u>Backhoe w/ Breaker</u>	<u>1.04 yd³/ 0.8 m³</u>	<u>1</u>					<u>Deleted Equipment</u>
24	Truck Mounted Crane	6-10 T	1	23	Truck Mounted Crane	6-10 T	1	No Change
25	Teleopic Manlift, 60ft. Max. Working Height	60 H	1	24	Teleopic Manlift, 60ft. Max. Working Height	60 H	1	No Change
				25	<u>Backhoe, Wheel Mounted</u>	<u>0.28m³/ 0.37yd³</u>	<u>1</u>	<u>Additional Equipment</u>

Current Provision of BDs				Amended Provision under this Supplemental Bulletin				Remarks
BILL OF QUANTITIES (BOQ)								
Pay Item No.	Description	Unit	Quantity	Pay Item No.	Description	Unit	Quantity	
PART B. OTHER GENERAL REQUIREMENTS				PART B. OTHER GENERAL REQUIREMENTS				
B.5	Project Billboard / Signboard	Each	3.00	B.5	Project Billboard / Signboard	Each	3.00	No Change
B.7(2)	Occupational Safety and Health Program	Lump sum	1.00	B.7(2)	Occupational Safety and Health Program	Lump sum	1.00	No Change
B.8(2)	Traffic Management	Lump sum	1.00	B.8(2)	Traffic Management	Lump sum	1.00	No Change
B.9	Mobilization / Demobilization	Lump sum	1.00	B.9	Mobilization / Demobilization	Lump sum	1.00	No Change
PART C. EARTHWORK				PART C. EARTHWORK				
100(1)	Clearing and Grubbing	Hectare	2.73	100(1)	Clearing and Grubbing	Hectare	2.73	No Change
100(3)a1	Individual Removal of Trees, 150-300mm dia, small	Each	5.00	100(3)a1	Individual Removal of Trees, 150-300mm dia, small	Each	21.00	Amended Quantity
100(3)a2	Individual Removal of Trees, 301-500mm dia, small	Each	1.00	100(3)a2	Individual Removal of Trees, 301-500mm dia, small	Each	4.00	Amended Quantity
100(3)a3	Individual Removal of Trees, 501-750mm dia, small	Each	2.00	100(3)a3	Individual Removal of Trees, 501-750mm dia, small	Each	2.00	No Change

100(3)a4	Individual Removal of Trees, 751-900mm dia, small	Each	<u>1.00</u>	100(3)a4	Individual Removal of Trees, 751-900mm dia, small	Each	2.00	<u>Amended Quantity</u>
101(1)	Removal of Structures and Obstruction	Lump Sum	1.00	101(1)	Removal of Structures and Obstruction	Lump Sum	1.00	No Change
<u>101(2)</u>	<u>Removal of Actual Structures and Obstruction</u>	<u>Each</u>	<u>1.00</u>					<u>Deleted Pay Item</u>
101(4)a1	Removal of Actual Structures/ Obstruction, 610mm dia, RCPC	Linear Meter	4.00	101(4)a1	Removal of Actual Structures/ Obstruction, 610mm dia, RCPC	Linear Meter	4.00	No Change
101(4)a3	Removal of Actual Structures/ Obstruction, 910mm dia, RCPC	Linear Meter	<u>5.00</u>	101(4)a3	Removal of Actual Structures/ Obstruction, 910mm dia, RCPC	Linear Meter	6.00	<u>Amended Quantity</u>
				<u>101(4)a6</u>	<u>Removal of Actual Structures/ Obstruction, 1520 mm dia. RCPC</u>	<u>Linear Meter</u>	<u>5.00</u>	<u>Additional Pay Item</u>
102(2)	Surplus Common Excavation	Cubic Meter	<u>295.57</u>	102(2)	Surplus Common Excavation	Cubic Meter	509.75	<u>Amended Quantity</u>
103(1)a	Structure Excavation, Common Soil	Cubic Meter	<u>762.58</u>	103(1)a	Structure Excavation, Common Soil	Cubic Meter	1,425.00	<u>Amended Quantity</u>
103(3)	Foundation Fill	Cubic Meter	<u>77.89</u>	103(3)	Foundation Fill	Cubic Meter	84.87	<u>Amended Quantity</u>
103(6)a	Pipe Culverts and Drain Excavation, Common Soil	Cubic Meter	<u>122.68</u>	103(6)a	Pipe Culverts and Drain Excavation, Common Soil	Cubic Meter	61.07	<u>Amended Quantity</u>
104(1)a	Embankment from Roadway/Structure Excavation, Common Soil	Cubic Meter	<u>8,035.12</u>	104(1)a	Embankment from Roadway/Structure Excavation, Common Soil	Cubic Meter	7,941.00	<u>Amended Quantity</u>
<u>104(2)a</u>	<u>Embankment from Borrow, Common Soil</u>	<u>Cubic Meter</u>	<u>1,242.01</u>					<u>Deleted Pay Item</u>
105(1)a	Subgrade Preparation, Common Material	Square Meter	<u>9,440.61</u>	105(1)a	Subgrade Preparation, Common Material	Square Meter	9,439.67	<u>Amended Quantity</u>
PART D. SUBBASE AND BASE COURSE				PART D. SUBBASE AND BASE COURSE				
200(1)	Aggregate Subbase Course	Cubic Meter	<u>4,465.41</u>	200(1)	Aggregate Subbase Course	Cubic Meter	4,440.00	<u>Amended Quantity</u>
PART E. SURFACE COURSES				PART E. SURFACE COURSES				
311(1)a	Portland Cement Concrete Pavement (Unreinforced) - 0.15 m. thk., 14 days	Square Meter	<u>1,800.00</u>	311(1)a	Portland Cement Concrete Pavement (Unreinforced) - 0.15 m. thk., 14 days	Square Meter	2,235.00	<u>Amended Quantity</u>
311(1)d1	Portland Cement Concrete Pavement (Unreinforced) - 0.25 m. thk., 14 days	Square Meter	<u>7,930.00</u>	311(1)d1	Portland Cement Concrete Pavement (Unreinforced) - 0.25 m. thk., 14 days	Square Meter	7,930.00	<u>Amended Quantity</u>

PART F. BRIDGE CONSTRUCTION (STREETLIGHT PEDESTAL)				PART F. BRIDGE CONSTRUCTION (STREETLIGHT PEDESTAL)				
404(1)a	Reinforcing Steel, Grade 40	Kilogram	<u>735.80</u>	404(1)a	Reinforcing Steel, Grade 40	Kilogram	<u>7,939.47</u>	<u>Amended Quantity</u>
404(1)b	Reinforcing Steel, Grade 60	Kilogram	<u>2,035.28</u>	404(1)b	Reinforcing Steel, Grade 60	Kilogram	<u>7,579.10</u>	<u>Amended Quantity</u>
405(1)b3	Structural Concrete, Class A (27.58 Mpa), 28 days	Cubic Meter	<u>38.06</u>	405(1)b3	Structural Concrete, Class A (27.58 Mpa), 28 days	Cubic Meter	<u>139.85</u>	<u>Amended Quantity</u>
				407(8)	<u>Lean concrete, Class B (16.5 Mpa)</u>	<u>Cubic Meter</u>	<u>5.24</u>	<u>Additional Pay Item</u>
PART G. DRAINAGE AND SLOPE PROTECTION STRUCTURE				PART G. DRAINAGE AND SLOPE PROTECTION STRUCTURE				
500(1)d	Pipe Culvert, Class IV, RCPC	Linear Meter	<u>29.00</u>	500(1)d	Pipe Culvert, Class IV, RCPC	Linear Meter	<u>39.00</u>	<u>Amended Quantity</u>
500(3)a	Lined Canal, Rectangular, Reinforced Concrete	Linear Meter	<u>880.00</u>	500(3)a	Lined Canal, Rectangular, Reinforced Concrete	Linear Meter	<u>900.00</u>	<u>Amended Quantity</u>
505(2)a	Grouted Riprap, Class A	Cubic Meter	<u>478.59</u>	505(2)a	Grouted Riprap, Class A	Cubic Meter	<u>1,233.43</u>	<u>Amended Quantity</u>
506(1)	Stone Masonry	Cubic Meter	<u>15.49</u>	506(1)	Stone Masonry	Cubic Meter	<u>214.04</u>	<u>Amended Quantity</u>
				508(1)	<u>Hand-Laid Rock Embankment</u>	<u>Cubic Meter</u>	<u>73.05</u>	<u>Additional Pay Item</u>
PART H. MISCELLANEOUS STRUCTURES				PART H. MISCELLANEOUS STRUCTURES				
603(3)a1	Metal Guardrail (Metal Beam) Including Post, Single, W-Beam	Linear Meter	163.83	603(3)a1	Metal Guardrail (Metal Beam) Including Post, Single, W-Beam	Linear Meter	163.83	No Change
603(4)b	Metal Beam End Piece, Bull Nose	Each	14.00	603(4)b	Metal Beam End Piece, Bull Nose	Each	14.00	No Change
612(1)	Reflectorized Thermoplastic Pavement Markings, White	Square Meter	<u>321.35</u>	612(1)	Reflectorized Thermoplastic Pavement Markings, White	Square Meter	<u>322.70</u>	<u>Amended Quantity</u>
624(9)b1	Single Arm Solar LED Roadway Lighting, 8m-Pole, 50W - 80W	Each	<u>52.00</u>	624(9)b1	Single Arm Solar LED Roadway Lighting, 8m-Pole, 50W - 80W	Each	<u>53.00</u>	<u>Amended Quantity</u>

This Supplemental Bulletin shall form an integral part of the Bidding Documents.

For the guidance and information of all concerned.


ROMEO C. CANIBAN
 Chief, Construction Section
 BAC Chairperson