


Department of Public Works and Highways

Contract ID: **25LD0158**
 Contract Name: **Construction of Classroom building for ICT and Homes Economics Laboratory, Tagabuli Elementary School, Santa Cruz, Davao del Sur**
 Location of the Contract: **Santa Cruz, Davao del Sur**

Davao del Sur District Engineering Office
 Digos City, Davao del Sur

SUPPLEMENTAL BULLETIN NO. 2025-100
 July 8, 2025

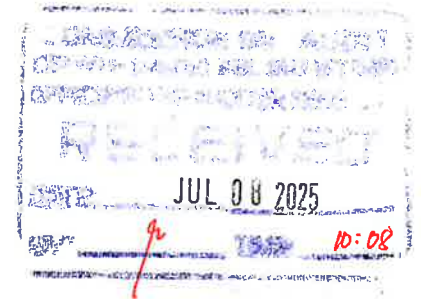

SUBJECT: Amendment of Minimum Major Equipment Requirements and Bill of Quantities (BOQ)

This Supplemental Bulletin No. 2025-100 is issued to amend provisions in the Bidding Documents (BDs) for the above stated contract, as follows:

Current Provision of BDs				Amended Provision under this Supplemental Bulletin				Remarks
MINIMUM MAJOR EQUIPMENT REQUIREMENTS								
Construction Equipment		Minimum Capacity/ Unit	Required No. of Units	Construction Equipment		Minimum Capacity/ Unit	Required No. of Units	
1	Stake Cargo/Service Truck	9-10 mt	1	1	Stake Cargo/Service Truck	9-10 mt	1	No Change
2	Backhoe	0.80m³/ 1.04yd³	1	2	Backhoe	0.80m³/ 1.04yd³	1	No Change
3	Dump Truck	12yd³/ 10m³	2	3	Dump Truck	12yd³/ 10m³	2	No Change
4	Plate Compactor, 400-500 Gasoline Engine	5 Hp	1	4	Plate Compactor, 400-500 Gasoline Engine	5 Hp	1	No Change
5	One Bagger Mixer	4-6 ft³/min	1	5	One Bagger Mixer	4-6 ft³/min	1	No Change
6	Bar Cutter, Single Phase	25mm Rebar Ø	1	6	Bar Cutter, Single Phase	25mm Rebar Ø	1	No Change
7	Bar Bender, Three Phase	25mm Rebar Ø	1	7	Bar Bender, Three Phase	25mm Rebar Ø	1	No Change
8	Welding Machine, Electric Driven/DC Outout	500 Amperes	2	8	Welding Machine, Electric Driven/DG Outout	500 Amperes	2	No Change
9	Cutting Outfit	-	1	9	Cutting Outfit	-	1	No Change
				10	Boom Truck	2-5 mt	1	Additional Pay Item

Current Provision of BDs (Including Previous Amendments)				Amended Provision under this Supplemental Bulletin				Remarks
BILL OF QUANTITIES (BOQ)								
Pay Item No.	Description	Unit	Quantity	Pay Item No.	Description	Unit	Quantity	
PART B. OTHER GENERAL REQUIREMENTS				PART B. OTHER GENERAL REQUIREMENTS				
B.3(1)	Permits and Clearances	Lump sum	1.00	B.3(1)	Permits and Clearances	Lump sum	1.00	No Change
B.5(1)	Project Billboard / Signboard	Each	2.00	B.5(1)	Project Billboard / Signboard	Each	2.00	No Change

B.7(1)	Occupational Safety and Health	Lump sum	1.00	B.7(1)	Occupational Safety and Health	Lump sum	1.00	No Change
B.9(1)	Mobilization/ Demobilization	Lump sum	1.00	B.9(1)	Mobilization/ Demobilization	Lump sum	1.00	No Change
DIVISION I GENERAL				DIVISION I. GENERAL				
PART C. EARTHWORK				PART C. EARTHWORK				
803(1)a	Structure Excavation, Common Soil	Cubic Meter	<u>67.00</u>	803(1)a	Structure Excavation, Common Soil	Cubic Meter	<u>63.00</u>	<u>Amended Quantity</u>
804(1)a	Embankment from Roadway/Structure Excavation, Common Soil	Cubic Meter	30.00	804(1)a	Embankment from Roadway/Structure Excavation, Common Soil	Cubic Meter	30.00	No Change
804(2)a	Embankment from Borrow, Common Soil	Cubic Meter	60.00	804(2)a	Embankment from Borrow, Common Soil	Cubic Meter	60.00	No Change
804(7)	Gravel Fill	Cubic Meter	<u>30.00</u>	804(7)	Gravel Fill	Cubic Meter	<u>27.00</u>	<u>Amended Quantity</u>
PART D. PLAIN AND REINFORCED CONCRETE WORK				PART D. PLAIN AND REINFORCED CONCRETE WORK				
900(1)c	Structural Concrete, 3000 psi, Class A, 28 days	Cubic Meter	<u>20.00</u>	900(1)c	Structural Concrete, 3000 psi, Class A, 28 days	Cubic Meter	<u>17.00</u>	<u>Amended Quantity</u>
900(1)d	Structural Concrete, 4000 psi, Class A, 28 days	Cubic Meter	<u>26.00</u>	900(1)d	Structural Concrete, 4000 psi, Class A, 28 days	Cubic Meter	<u>25.00</u>	<u>Amended Quantity</u>
902(1)a1	Reinforcing Steel (Deformed), Grade 40	Kilogram	<u>3,061.63</u>	902(1)a1	Reinforcing Steel (Deformed), Grade 40	Kilogram	<u>2,758.07</u>	<u>Amended Quantity</u>
902(1)a2	Reinforcing Steel (Deformed), Grade 60	Kilogram	2,220.25	902(1)a2	Reinforcing Steel (Deformed), Grade 60	Kilogram	2,220.25	No Change
903(2)	Formworks and Falseworks	Square Meter	<u>158.00</u>	903(2)	Formworks and Falseworks	Square Meter	<u>126.00</u>	<u>Amended Quantity</u>
DIVISION II BUILDINGS				DIVISION II. BUILDINGS				
PART E. FINISHING AND OTHER CIVIL WORKS				PART E. FINISHING AND OTHER CIVIL WORKS				
1046(2)a1	CHB Non-Load Bearing (including Reinforcing Steel), 100 mm thk.	Square Meter	<u>219.00</u>	1046(2)a1	CHB Non-Load Bearing (including Reinforcing Steel), 100 mm thk.	Square Meter	<u>208.00</u>	<u>Amended Quantity</u>
1003(11)a1	Fascia Board, 19mm thk. Fiber Cement Board	Meter	61.00	1003(11)a1	Fascia Board, 19mm thk. Fiber Cement Board	Meter	61.00	No Change
1003(12)	Fascia Board, Metal	Kilogram	188.16	1003(12)	Fascia Board, Metal	Kilogram	188.16	No Change
1003(17)	Carpentry and Joinery Works	Lump sum	1.00	1003(17)	Carpentry and Joinery Works	Lump sum	1.00	No Change
1004(2)	Finishing Hardware	Lump sum	1.00	1004(2)	Finishing Hardware	Lump sum	1.00	No Change
1005(5)	Steel Window	Lump sum	1.00	1005(5)	Steel Window	Lump sum	1.00	No Change

1009(1)a	Jalousie Windows, Glass	Square Meter	18.36	1009(1)a	Jalousie Windows, Glass	Square Meter	18.36	No Change
1010(1)	Frames (Jambs, Sill, Head, Transoms and Mullions)	Set	6.00	1010(1)	Frames (Jambs, Sill, Head, Transoms and Mullions)	Set	6.00	No Change
1010(2)a	Doors, Flush	Square Meter	3.78	1010(2)a	Doors, Flush	Square Meter	3.78	No Change
1010(2)b	Doors, Wood Panel	Square Meter	7.56	1010(2)b	Doors, Wood Panel	Square Meter	7.56	No Change
1003(1)b2	Ceiling, 4.5mm Thk., Wood Frame, Marine Plywood	Square Meter	197.00	1003(1)b2	Ceiling, 4.5mm Thk., Wood Frame, Marine Plywood	Square Meter	197.00	No Change
1003(2)a3	Wall, 6mm Thk., Metal Frame, Fiber Cement Board	Square Meter	19.00	1003(2)a3	Wall, 6mm Thk., Metal Frame, Fiber Cement Board	Square Meter	19.00	No Change
1018(1)	Glazed Tiles and Trims	Square Meter	<u>38.00</u>	1018(1)	Glazed Tiles and Trims	Square Meter	34.00	Amended Quantity
1018(2)	Unglazed Tiles	Square Meter	8.00	1018(2)	Unglazed Tiles	Square Meter	8.00	No Change
1021(1)a	<u>Cement Floor Finish, Plain</u>	<u>Square Meter</u>	<u>184.00</u>					<u>Deleted Pay Item</u>
				1021(1)c	Cement Floor Finish, with Floor Hardener	Square Meter	153.00	Additional Pay Item
1027(1)	Cement Plaster Finish	Square Meter	<u>426.00</u>	1027(1)	Cement Plaster Finish	Square Meter	402.00	Amended Quantity
1038(1)	<u>Reflective Insulation</u>	<u>Square Meter</u>	<u>205.00</u>					<u>Deleted Pay Item</u>
1051(8)	Railing	Lump sum	1.00	1051(8)	Railing	Lump sum	1.00	No Change
1032(1)a	Painting Works, Masonry/Concrete	Square Meter	<u>516.00</u>	1032(1)a	Painting Works, Masonry/Concrete	Square Meter	503.00	Amended Quantity
1032(1)b	Painting Works, Wood	Square Meter	<u>232.00</u>	1032(1)b	Painting Works, Wood	Square Meter	235.00	Amended Quantity
1032(1)c	Painting Works, Steel	Square Meter	254.00	1032(1)c	Painting Works, Steel	Square Meter	254.00	No Change
1013(2)a	Fabricated Metal Roofing Accessory, Gauge 26 (0.551mm), Ridge/Hip Rolls	Linear Meter	24.00	1013(2)a	Fabricated Metal Roofing Accessory, Gauge 26 (0.551mm), Ridge/Hip Rolls	Linear Meter	24.00	No Change
1013(2)b	Fabricated Metal Roofing Accessory, Gauge 26 (0.551mm), Flashings	Linear Meter	29.00	1013(2)b	Fabricated Metal Roofing Accessory, Gauge 26 (0.551mm), Flashings	Linear Meter	29.00	No Change
1013(2)c	Fabricated Metal Roofing Accessory, Gauge 24 (0.701mm), Gutters	Linear Meter	11.00	1013(2)c	Fabricated Metal Roofing Accessory, Gauge 24 (0.701mm), Gutters	Linear Meter	11.00	No Change
1014(1)b2	Pre-painted Metal Sheets, above 0.427 mm thk., Rib Type, Long Span	Square Meter	245.00	1014(1)b2	Pre-painted Metal Sheets, above 0.427 mm thk., Rib Type, Long Span	Square Meter	245.00	No Change

1047(4)b	Metal Structure Accessories, Turnbuckle	Each	12.00	1047(4)b	Metal Structure Accessories, Turnbuckle	Each	12.00	No Change
1047(5)a	Metal Structure Accessories, Bolts and Rods	Kilogram	9.95	1047(5)a	Metal Structure Accessories, Bolts and Rods	Kilogram	9.95	No Change
1047(5)b	Metal Structure Accessories, Sagrods	Kilogram	47.95	1047(5)b	Metal Structure Accessories, Sagrods	Kilogram	47.95	No Change
1047(5)c	Metal Structure Accessories, Cross Bracing	Kilogram	74.59	1047(5)c	Metal Structure Accessories, Cross Bracing	Kilogram	74.59	No Change
1047(5)d	Metal Structure Accessories, Steel Plates	Kilogram	58.08	1047(5)d	Metal Structure Accessories, Steel Plates	Kilogram	58.08	No Change
1047(8)a	Structural Steel, Trusses	Kilogram	1,035.64	1047(8)a	Structural Steel, Trusses	Kilogram	1,035.64	No Change
1047(8)b	Structural Steel, Purlins	Kilogram	1,171.92	1047(8)b	Structural Steel, Purlins	Kilogram	1,171.92	No Change
1001(8)	Sewer Line Works	Lump sum	1.00	1001(8)	Sewer Line Works	Lump sum	1.00	No Change
1001(11)	Septic Vault / Tank, Concrete/CHB	Lump sum	1.00	1001(11)	Septic Vault / Tank, Concrete/CHB	Lump sum	1.00	No Change
1002(4)	Plumbing Fixtures	Lump sum	1.00	1002(4)	Plumbing Fixtures	Lump sum	1.00	No Change
1002(20)	Facial Mirror	Square Meter	0.90	1002(20)	Facial Mirror	Square Meter	0.90	No Change
1002(24)	Cold Water Lines	Lump sum	<u>11.00</u>	1002(24)	Cold Water Lines	Lump sum	<u>1.00</u>	Amended Quantity
PART F. ELECTRICAL				PART F. ELECTRICAL				
1100(10)	Conduits, Boxes & Fittings (Conduit Works/Conduit Rough-in)	Lump sum	1.00	1100(10)	Conduits, Boxes & Fittings (Conduit Works/Conduit Rough-in)	Lump sum	1.00	No Change
1101(33)	Wires and Wiring Devices	Lump sum	1.00	1101(33)	Wires and Wiring Devices	Lump sum	1.00	No Change
1102(1)	Panelboard with Main & Branch Breakers	Lump sum	1.00	1102(1)	Panelboard with Main & Branch Breakers	Lump sum	1.00	No Change
1103(1)	Lighting Fixtures	Lump sum	1.00	1103(1)	Lighting Fixtures	Lump sum	1.00	No Change

This Supplemental Bulletin shall form an integral part of the Bidding Documents.

For the guidance and information of all concerned.

ROMEO C. CANIBAN
 Chief, Construction Section
 BAC Chairperson