






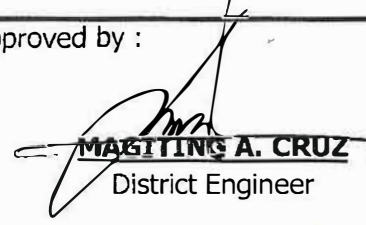
Republic of the Philippines
DEPARTMENT OF PUBLIC WORKS AND HIGHWAYS
BOHOL 3RD DISTRICT ENGINEERING OFFICE
Sawang, Guindulman, Bohol, Region VII

PURCHASE REQUEST

Entity Name: DPWH- BOHOL 3RD DEO

Fund Cluster: _____

COA Circular No. 2015-07 S 2015

Office/Section : Maintenance Section		PR No. : <u>25GSHB0004</u>		Date : <u>05/22/25</u>				
		Responsibility Center Code : _____						
Stock/ Property No.	Item No.	Unit	Item Description	Qty	Unit Cost	Total Cost		
			Roadway Lighting					
	1	bags	Cement	240				
	2	cu.m.	Sand	12				
	3	cu.m.	Gravel	24				
	4	bd.ft.	Lumber Good 2x3x12 (53pcs)	318				
	5	pcs.	Plywood 1/2" x 4' x 8'	19				
	6	kls.	Tie Wire	36				
	7	kls.	CWN #4	12				
	8	kls.	CWN #1½	8				
	9	kgs.	Reinforcing Steel Bar 10mm (125pcs)	465.00				
	10	kgs.	Reinforcing Steel Bar 16mm (110pcs)	1042.80				
	11	set	Solar Street Light	31				
			Specification:					
			Solar Street Light Single Arm Post (LED 200 Watts Semi-Integrated 270k p- 700k daylight (13000 - 15000 Lumens), Mobile Application Controlled Lithium Battery, Solar Panel High efficiency Mono-Crystalline 150w/18V, 12.8V 60AM Battery, 180pcs LED Source, 36 hrs Discharging time, 3 years Warranty, Battery Charging Time: 6-8 hrs effectively sunlight, Working time: Light 10-12 hrs everyday sustainable 3-5 rainy days, Control System: w/out light sensor & remote; with MPPT M1280 Controller.					
			1-9 meter Tapered Pole, Single Arm Length 1500 (600mm Diameter, Orange Color) Hot Dip Galvanize Q235 Steel, Painted with Zinc Chromate (Primer & Top Coat). Top Diameter 70mm, Bottom Diameter 150mm, Thickness 30mm, Base Plate 320x320x16mm.					
CERTIFICATION Availability of Budget / Allotment  SALVACION G. LIGTAS Budget Officer II			CERTIFICATION The items being requisitioned were included in the approved Annual Procurement Plan for CY 2025  MARCELA B. DALEN Engineer III Procurement Head			TOTAL	4,999,983.00	
Purpose : For use in Installation & Supply of Solar Street Lights within the district.								
Requested by :  HENRY G. DALEN Chief Maintenance Section							Approved by :  MAGTTING A. CRUZ District Engineer	